


# Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-202-BK

**excel**  
without compromise.

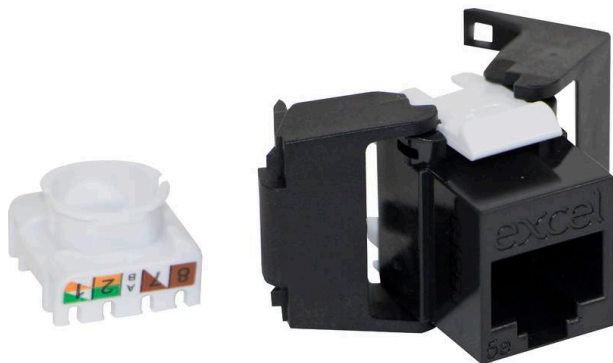

✕ ISO, EN & TIA compliant

✕ Toolless termination design

✕ Low profile design - 28mm overall depth

✕ UL94V-0 fire retardant plastic

✕ Supports Gigabit Ethernet application

✕ Delta 3rd party verified

## Product Overview

100-202-BK Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black, available as part of our range of excel Cat5e keystone jacks for RJ45 network connections.

The Excel Cat5e Low Profile Unscreened Keystone Jack, is a reduced size toolless termination RJ45 socket. The reduced size allows for multiple cable entry directions to be accommodated when this jack is mounted in a standard depth back box. This permits many mounting options including flush shutters at the outlet as well as more common angled shutter used with keystone jacks.

The low profile design allows this jack to fit in the Excel 0.5U 24 Port Patch Panel resulting in a maximum port density of 48 per 1U. The socket itself is housed in a high quality fire retardant plastic cast housing, which opens at the rear in a butterfly manner to reveal the IDC termination points.

## Product Specifications

Feature	Values
Model	Jack
Type of connector	RJ45 8(8)
Category	5E
Suitable for round cable	Yes
Suitable for solid core	Yes
Colour	Black
AWG-range	22...26

# Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-202-BK



## Additional specifications


Features	Values
Width	16.2mm
Depth	28.3mm
Height	21.5mm
Housing	ABS High-Impact
RJ45 Contacts	Nickel plated phosphor bronze alloy with 50 micro-inch Gold plating
IDC Contacts	Tin plated phosphor bronze alloy
RJ45 Life	Minimum 750 insertions
Storage temperature	-40 to +70°C
Operating temperature	-10 to +60°C

# Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-202-BK

**excel**  
without compromise.

## Product drawing

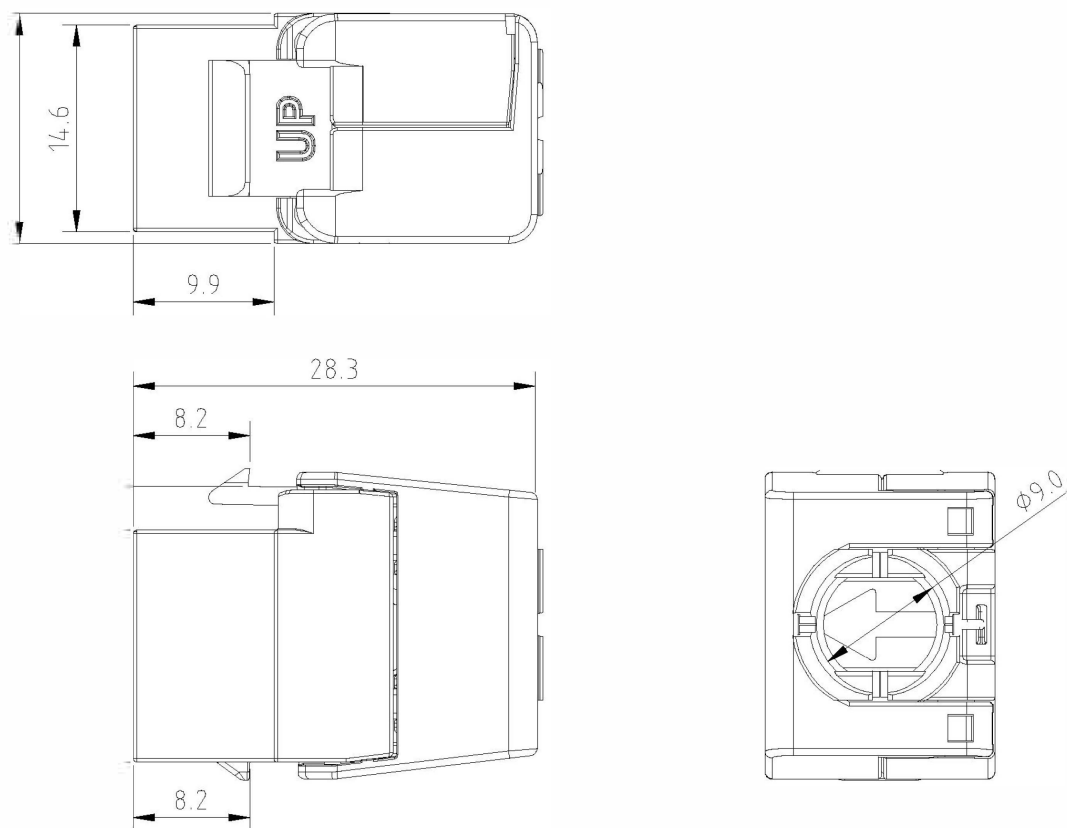

## Included accessories

Accessories	Singles	24-packs
Nylon cable tie	1	24
Wiring cap	1	24

## Standards

Applicable standard	Detail
RoHS	Compliant to the Restriction of Hazardous Substances
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements

# Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black

Item Code: 100-202-BK



ANSI/TIA 568-2.D

Balanced Twisted-Pair Telecommunications Cabling and Components Standards

UL-94-V-0

Burning stops within 10 seconds after two applications of ten seconds each of a flame to a test bar. NO flaming drips are allowed.

WFD

Compliant to Waste Framework Directive

SCIP

Compliant - Does Not Contain Substances of Concern in Products

## Part Number Table

Part Number	Description
100-202-BK	Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black
100-202-BK-24	Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless Black Box 24
100-202-WT	Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless White
100-202-WT-24	Excel Cat5e UTP Unscreened Low Profile Keystone Jack Toolless White Box 24



KKMtech Sp. z o.o. | ul Santocka 39 71083 Szczecin POLAND

T: +48 91 462 44 12 | E: biuro@kkmtech.pl | W: www.kkmtech.pl